

## INSTALLING PRESSURE TANK KIT (Optional)




**NOTE:** If your RO system does not have a product water check valve in the outlet of the RO housing you must purchase a check valve fitting. Failure to do so may result in premature RO membrane failure.

The "in & out" markings are on the top of the valve. The top side of the valve is the high pressure side and the bottom side is the low pressure side.

The outlet from the filter housings goes to the "in" on the top of the valve. The "out" goes to the membrane housing inlet using the tubing supplied.

The membrane housing product water outlet connects to the "in" on the bottom side of the auto shut off valve. The "out" on the bottom goes to the pressure tank and the drinking water faucet. Use one of the supplied 3 Way Tees to split the supply to the faucet and pressure tank.

The valve automatically shuts off production when the back pressure reaches approximately 65% of the incoming line pressure.

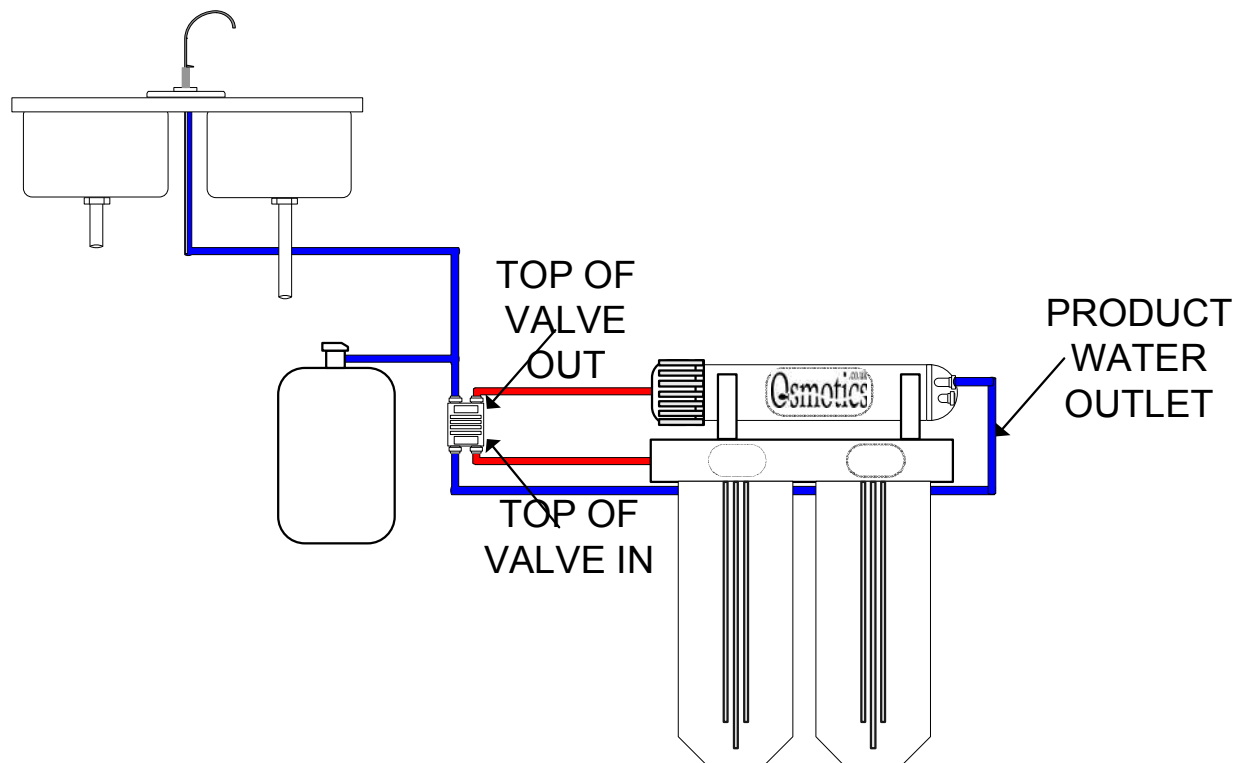

### Includes:-

- 1 X 2.2 Gallon tank
- 1 X Chrome Faucet
- 1 X Auto Shut off Valve
- 2 X 3 Way Quick Connect Tees
- 1 X 2 Metres of Blue RO Tubing
- 1 X 1/4" Ball Valve
- 1 X 1/4" Tank Valve